ULTRA SR1250B

REPEATER DECT TELEPHONE WITH INTEGRATED ANSWERING MACHINE

Ideal for :

- Office buildings
- Warehouses
- Multi storey houses
- …

UP TO 2400M TALKING RANGE !

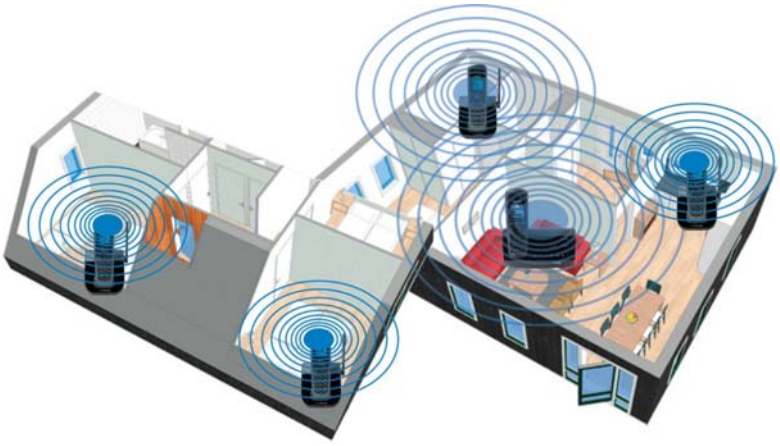

Handset

- LCD specification: dot matrix 2 line alphanumeric + 2 line icon
- LCD size: 1,6"
- LCD backlight
- Key backlight
- New message LED (event LED)
- Menu languages: 14
- Clock display
- Handset name display
- Intercom
- Call to all handsets
- Call transfer
- 3 way conference
- Auto answer (on/off by menu)
- Auto hang up (on/off by menu)
- Call timer
- Mute
- Handsfree
- Earpiece volume: 5 levels
- Handset speaker volume: 5 levels
- Pre-dialing (on hook dial)
- Redial memory: 5
- Maximum redial dial length: 24 digits
- Chain dial
- Network voicemail indicator (VMWI)
- Caller ID memory: 30
- Maximum dial length: 24 digits
- Name character length: 12 characters
- Phonebook memory: 200
- Copy CID memory to phonebook
- Copy re-dial number to phonebook
- 7 ringtones
- Ringer volume: ringer off + 5 levels
- Key touch tone: on/off
- Low battery warning tone: (on/off by menu)
- Keypad lock
- Alarm
- Time format selectable: 12/24 hrs
- Date format: DD-MM or MM-DD
- Auto transmission power control: depend on range

ULTRA SR1250B

REPEATER DECT TELEPHONE WITH INTEGRATED ANSWERING MACHINE

Charge station

- Max. handset registrations: 5
- System PIN: 4 digits
- Base message indicator: 2 Digits / 7 Segment
- Do not disturb LED
- Tone/pulse dial
- Type I/type II Caller ID
- 1 ringtone
- Ringer volume: ringer off + 3 levels
- Find handset (paging)
- Charge current control
- Number of repeaters supported: 6
- Roaming (hand-over)

Technical details

- DECT 1.88 to 1.9 Ghz
- Max. power output : 10mW
- Input : Analogue PSTN line
- Encryption
- Range indoor : 50m /outdoor: 300m
- Battery talk time: 10h
- Battery standby time: 168h
- Battery charge time: 15h
- Rechargeable batteries: 2.4V 500mAh NiMH pack
- Power adapter: IN:AC100-240V 50Hz/60Hz
  OUT:DC6V/500mA
- Energy saving

Answering machine

- Recording time: 15 min
- Maximum number of incoming messages: 59
- Maximum recording time per ICM: 3 min.
- Compression rate for ICM recording: average 4.4Kbps
- Message time/date stamp (displayed on LCD)
- Outgoing messages (OGM) answer only: 1
  answer & record: 1
- Maximum recording time per OGM: 1 min.
- Remote TAD access: line/HS
- Remote access pin: same as system pin
- Base TAD operation keys
- Answer delay (times): 3/4/5/6/7/8/TS
- Call screening : base/handset

How does it work ?

Ultra range: Maximum coverage scenario

Talking range & coverage is dramatically increased !

Up to 2400m talking range !

* Alignment expandable up to 6 repeaters and 5 handsets

The possibilities described in this datasheet are under reserve of changes

ULTRA RANGE DECT